

## EXIR HD-TVI CAMERA

### 5MP Motorized VF EXIR Bullet Camera


VHC-5530



### Key Features

- 5 Megapixel high-performance CMOS
- Analog HD output, up to 5MP resolution
- 2.8-12mm motorized vari-focal lens
- EXIR technology, up to 40m IR distance
- True Day/Night
- OSD menu, DNR, SMART IR
- UTC (Up the Coax) function
- IP67 weatherproof

### Dimensions

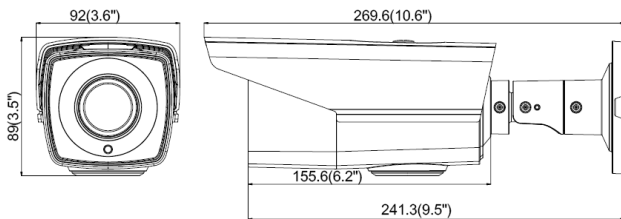

### Technical Specifications

Model No	VHC-5530
Image Sensor	5MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	2592 (H) × 1944 (V)
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter speed	1/25 s to 1/50,000 s
Lens	2.8 to 12 mm motorized vari-focal lens
Lens Mount	φ14
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	2592 × 1944 @ 20fps
HD Video Output	1 Analog HD output
S / N Ratio	>62dB
AGC	Support
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Support
SMART IR	Support
Digital Noise Reduction	Support
Mirror	Support
Language	English
Working Temperature	-40°C ~ +60°C
Humidity	Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 20%
Power Consumption	Max. 6W
Weather Proof Ratings	IP 67
IR Range	Up to 40m
Communication	Up the coax
Dimensions	92 mm × 84.8 mm × 269.6 mm(3.62" × 3.34" × 3.34")
Weight	Approx. 900 g (1.98 lb.)